


## Bifacial Double Glass Module DAS-DH144NA

# 570W~595W

N Type

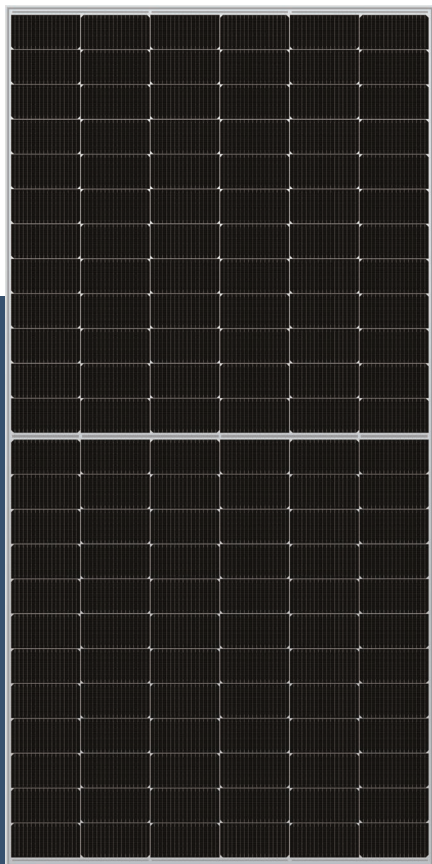

### Key Features



#### High Efficiency

Leading module efficiency in industry, up to 23.0%



#### Excellent Appearance and Performance

Bifacial solar cell, symmetrical design, low risk of micro-crack



#### High Reliability

Passed 3\*IEC standard test, 15 years materials warranty, 30 years power warranty



#### Excellent Rear Side Power Generation

Bifaciality is up to 80%, up to 30% more energy yield than conventional modules



#### Better low irradiance performance

Higher power output even under low irradiance environments like on cloudy or foggy days



#### Extensive Application Scenes

More extensive application scenes, such as BIPV, snow field, vertical installation, high humidity, strong wind and desert region

Maximum Power Output

**595W**

Maximum Module Efficiency

**23.0%**

Power Output Tolerance

**0~+5W**

### Product and Quality Certifications

IEC 61215, IEC 61730


ISO 9001: Quality Management System

ISO 14001: Environment Management System

ISO 45001: Occupational Health and Safety Management System

IEC 62716, IEC 61701: Ammonia, Salt mist corrosion test


IEC TS 62804-1, IEC 60068-2-68: PID test, Dust and Sand test

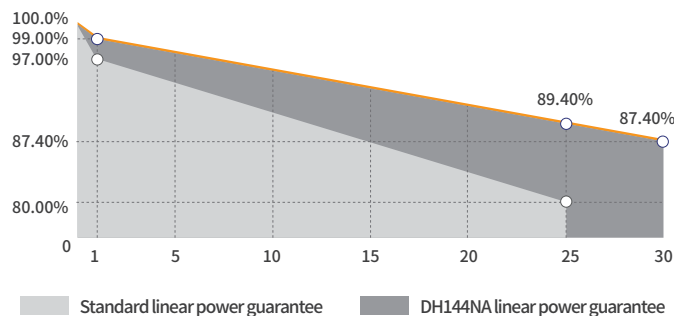



### Leading product and power warranty

**-1.00%** 1st-year Degradation **-0.40%** Annual Degradation **15** Years materials and workmanship warranty **30** Years linear power warranty

## Engineering Drawing (mm)

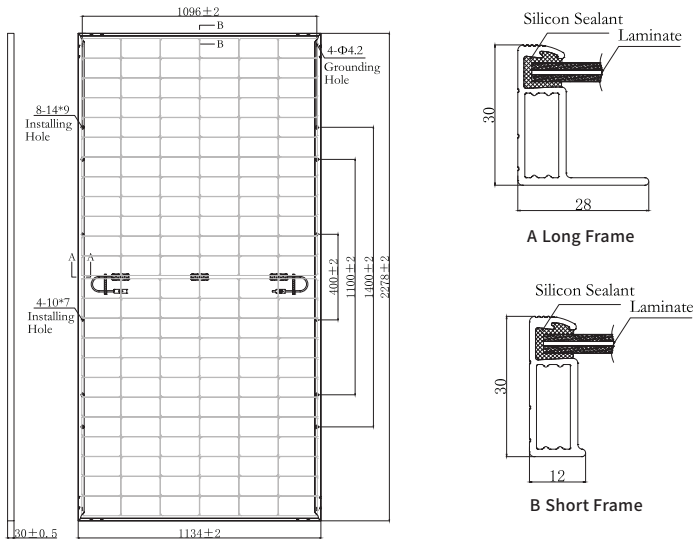

## Characteristic Curves(585W)

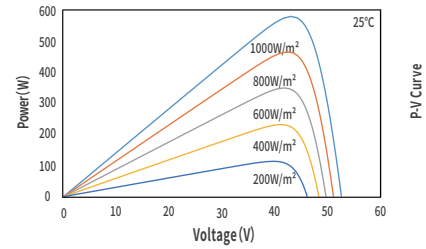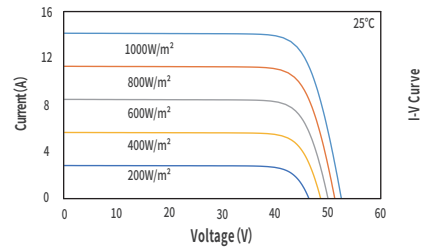

## Electrical Parameters (STC \*)

Nominal Max. Power(Pmax/W)	570	575	580	585	590	595
Open Circuit Voltage(Voc/V)	51.60	51.80	52.00	52.20	52.40	52.60
Short Circuit Current(Isc/A)	14.25	14.30	14.37	14.43	14.49	14.54
Operating Voltage(Vmp/V)	42.32	42.50	42.69	42.87	43.05	43.22
Operating Current(Imp/A)	13.47	13.53	13.59	13.65	13.71	13.77
Efficiency(%)	22.1	22.3	22.5	22.6	22.8	23.0

STC \*: Irradiance = 1000 W/m<sup>2</sup>, Cell Temperature = 25°C, AM = 1.5  
Test condition is based on the front side

## Mechanical Parameters

Cell Type	N Type
Module Size	2278×1134×30mm
Glass Thickness	2.0mm + 2.0mm
Module Weight	31.3Kg
Output Cable	4mm <sup>2</sup> , cable length 300mm (can be customized)
Connector	MC4 Similar
Junction Box	IP68, 3 bypass diodes
Frame	Anodized aluminium alloy

## Electrical Parameters (NMOT \*)

Nominal Max. Power(Pmax/W)	433	437	440	444	448	452
Open Circuit Voltage(Voc/V)	49.41	49.60	49.79	49.98	50.17	50.36
Short Circuit Current(Isc/A)	11.49	11.53	11.58	11.63	11.68	11.72
Operating Voltage(Vmp/V)	39.85	40.02	40.19	40.36	40.53	40.69
Operating Current(Imp/A)	10.86	10.91	10.96	11.00	11.05	11.10

NMOT \*: Irradiance = 800 W/m<sup>2</sup>, Ambient Temperature = 20°C, AM = 1.5,  
Wind Speed = 1 m/s  
Test condition is based on the front side

## Temperature Coefficients

Short Circuit Current(Isc)	+0.045%/°C
Open Circuit Voltage(Voc)	-0.250%/°C
Nominal Max. Power(Pmax)	-0.300%/°C
NMOT	42±2°C

## Backside Power Gain (For 585W)

Power Gain	10%	15%	20%	25%	30%
Nominal Max. Power(Pmax/W)	643.5	672.8	702.0	731.3	760.5
Open Circuit Voltage(Voc/V)	52.20	52.20	52.30	52.30	52.30
Short Circuit Current(Isc/A)	15.87	16.59	17.32	18.04	18.76
Operating Voltage(Vmp/V)	42.87	42.87	42.97	42.97	42.97
Operating Current(Imp/A)	15.01	15.69	16.34	17.02	17.70

## Operating Parameters

Max. System Voltage	DC1500V
Power Tolerance	0 ~ +5 W
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	30A
Static Load	Front 5400Pa, Back 2400Pa
Packing Data	36 pcs/Pallet; 180(20GP); 720(40HQ)