




Bifacial Double Glass Module
 DAS-DH144NA

560W~580W

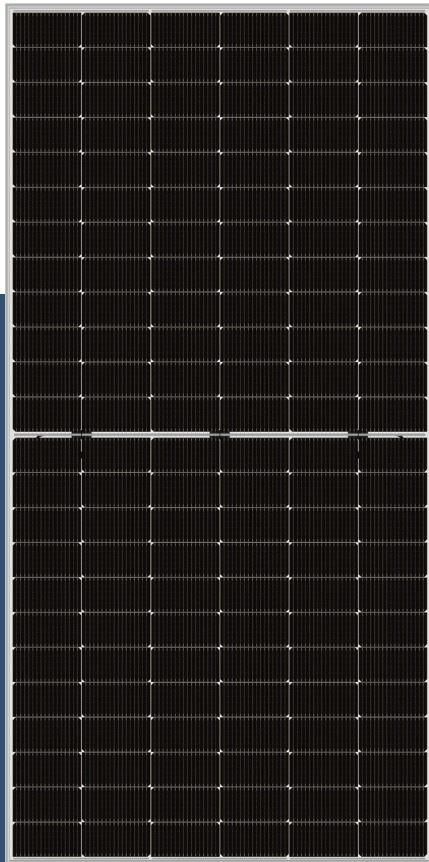


Key Features

- High Efficiency**
Leading module efficiency in industry, up to 22.5%
- Excellent Appearance and Performance**
Bifacial solar cell, symmetrical design, low risk of micro-crack
- High Reliability**
Passed 3*IEC standard test, 15 years materials warranty, 30 years power warranty
- Excellent Rear Side Power Generation**
Bifaciality is up to 80%, up to 30% more energy yield than conventional modules
- Better low irradiance performance**
Higher power output even under low irradiance environments like on cloudy or foggy days
- Extensive Application Scenes**
More extensive application scenes, such as BIPV, snow field, vertical installation, high humidity, strong wind and desert region

Maximum Power Output **580W** | Maximum Module Efficiency **22.5%** | Power Output Tolerance **0~+5W**

Product and Quality Certifications


- IEC 61215, IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety Management System
- IEC 62716, IEC 61701: Ammonia, Salt mist corrosion test
- IEC TS 62804-1, IEC 60068-2-68: PID test, Dust and Sand test

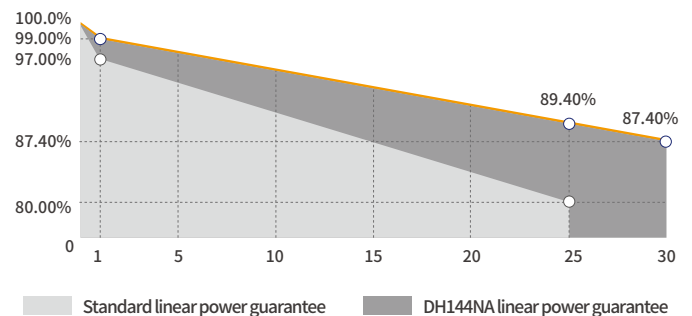



Leading product and power warranty

-1.00% 1st-year Degradation -0.40% Annual Degradation 15 Materials and workmanship warranty 30 Linear power warranty

Engineering Drawing (mm)

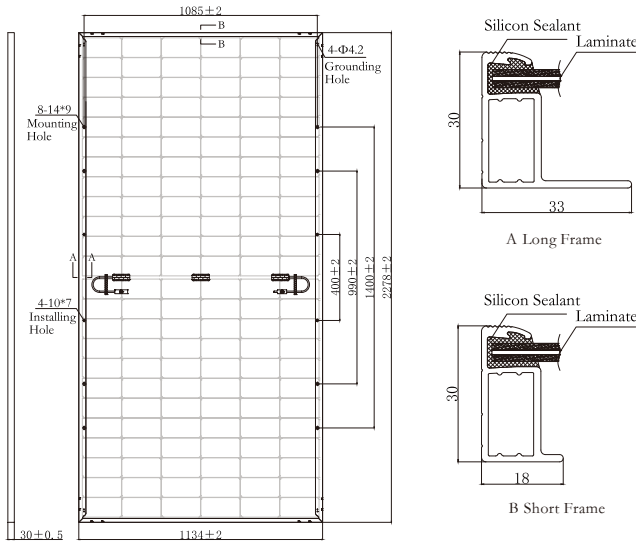

Characteristic Curves(570W)

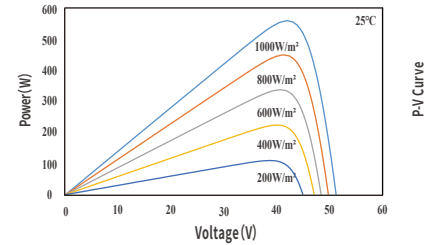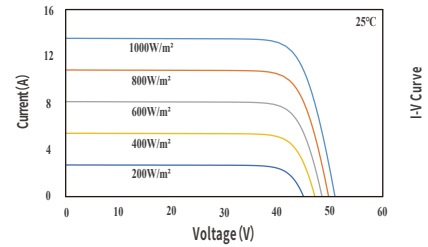

Electrical Parameters (STC *)

Nominal Max. Power(Pmax/W)	560	565	570	575	580
Open Circuit Voltage(Voc/V)	51.30	51.39	51.60	51.80	52.00
Short Circuit Current(Isc/A)	13.78	13.79	14.25	14.30	14.37
Operating Voltage(Vmp/V)	42.69	43.00	42.32	42.50	42.69
Operating Current(Imp/A)	13.12	13.14	13.47	13.53	13.59
Efficiency(%)	21.7	21.9	22.1	22.3	22.5

STC *: Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5
Test condition is based on the front side

Mechanical Parameters

Cell Type	N Type
Module Size	2278×1134×30mm
Glass Thickness	2.0mm
Module Weight	31.3Kg
Output Cable	4mm ² , cable length 300mm (can be customized)
Connector	MC4 compatible
Junction Box	IP68, 3 bypass diodes
Frame	Anodized aluminium alloy

Electrical Parameters (NMOT *)

Nominal Max. Power(Pmax/W)	424.0	427.0	430.0	433.0	437.0
Open Circuit Voltage(Voc/V)	48.52	48.61	48.70	48.89	49.08
Short Circuit Current(Isc/A)	11.11	11.12	11.13	11.17	11.22
Operating Voltage(Vmp/V)	40.27	40.53	40.73	40.93	41.19
Operating Current(Imp/A)	10.53	10.54	10.56	10.58	10.61

NMOT *: Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5,
Wind Speed = 1 m/s
Test condition is based on the front side

Temperature Coefficients

Short Circuit Current(Isc)	+0.045%/°C
Open Circuit Voltage(Voc)	-0.250%/°C
Nominal Max. Power(Pmax)	-0.300%/°C
NMOT	42±2°C

Backside Power Gain (For 570W)

Power Gain	10%	15%	20%	25%	30%
Nominal Max. Power(Pmax/W)	627.0	655.5	684.0	712.5	741.0
Open Circuit Voltage(Voc/V)	51.60	51.60	51.70	51.70	51.70
Short Circuit Current(Isc/A)	15.68	16.39	17.10	17.81	18.53
Operating Voltage(Vmp/V)	42.32	42.32	42.42	42.42	42.42
Operating Current(Imp/A)	14.82	15.49	16.12	16.80	17.47

Operating Parameters

Max. System Voltage	DC1500V
Power Tolerance	0 ~ +5 W
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	30A
Front Static Load	Snow load 5400Pa, Wind load 2400Pa
Packing Data	36 pcs/Pallet; 180(20GP); 720(40HQ)

